

ND-AF330C

ND-AF Series

330 W

The Project Solution



Powerful product features



Guaranteed positive power tolerance (0/+5%)



Polycrystalline silicon photovoltaic modules



Max. system voltage 1,500 V



Tested and certified
VDE, IEC/EN61215, IEC/EN61730



Safety class II/CE
Application class A



Fire rating class C



17% Module efficiency



Robust product design



5 busbar technology
Improved reliability
Higher efficiency
Reduced series resistance

Your solar partner for life



60 years of solar expertise



Linear power output guarantee



Local support team in Europe



Product guarantee



50 million PV modules installed



Top PV brand award



Energy Solutions

SHARP

Be Original.

Electrical data (STC)

ND-AF330C

Maximum power	P_{max}	330	W_p
Open-circuit voltage	V_{oc}	45.96	V
Short-circuit current	I_{sc}	8.91	A
Voltage at point of maximum power	V_{mpp}	39.11	V
Current at point of maximum power	I_{mpp}	8.45	A
Module efficiency	η_m	17.0	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within ±10% of the indicated values of I_{sc} , V_{oc} and 0 to +5% of P_{max} (power measurement tolerance ±3%).

Reduction of efficiency from an irradiance of 1,000 W/m² to 200 W/m² ($T_{module} = 25\text{ °C}$) is less than 5%.

Electrical data (NMOT)

ND-AF330C

Maximum power	P_{max}	246.90	W_p
Open-circuit voltage	V_{oc}	43.56	V
Short-circuit current	I_{sc}	7.22	A
Voltage at point of maximum power	V_{mpp}	36.46	V
Current at point of maximum power	I_{mpp}	6.77	A

NMOT (Nominal Module Operating Temperature) = 42.5 °C.

Irradiance = 800 W/m², air temperature = 20 °C, wind speed = 1 m/s.

Mechanical data

Length	1,960 mm
Width	992 mm
Depth	40 mm
Weight	22.5 kg

Temperature coefficient

P_{max}	-0.38%/°C
U_{oc}	-0.28%/°C
I_{sc}	0.039%/°C


Limit values

Maximum system voltage	1,500 VDC
Over-current protection	15 A
Temperature range	-40 to +85 °C
Max. mechanical load (snow / wind)	2,400 Pa

Packaging data

Modules per pallet	26 pcs
Pallet size (L × W × H)	2.000 m × 1.055 m × 1.200 m
Pallet weight	620 kg

Dimensions (mm)

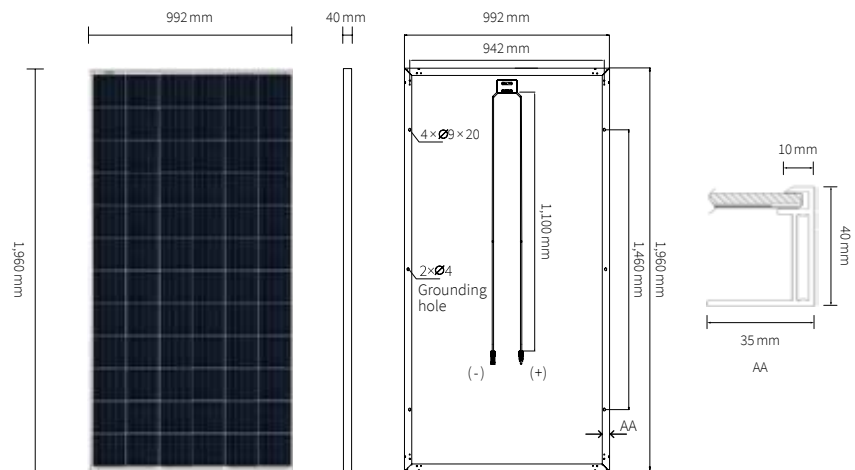

General data

Cells	polycrystalline 157 mm × 157 mm, 72 cells in series
Front glass	low iron tempered glass, 3.0 mm
Frame	anodized aluminium alloy, silver
Connection box	IP67, 3 bypass diodes
Cable	4.0 mm ² , length 1,100 mm
Connector	C1 Series, IP67

Note: Technical data is subject to change without prior notice. Before using Sharp products, please request the latest data sheets from Sharp. Sharp accepts no responsibility for damage to devices, which have been equipped with Sharp products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from www.sharp.eu/solar. This module should not be directly connected to a load.

Contact Sharp

SHARP Electronics GmbH
Energy Solutions Europe
Nagelsweg 33 - 35
20097 Hamburg, Germany
T: +49 (0) 40 / 2376-2436
E: SolarInfo.Europe@sharp.eu

SHARP
Be Original.

Sharp.co.uk/energysolutions | #SharpBeOriginal